
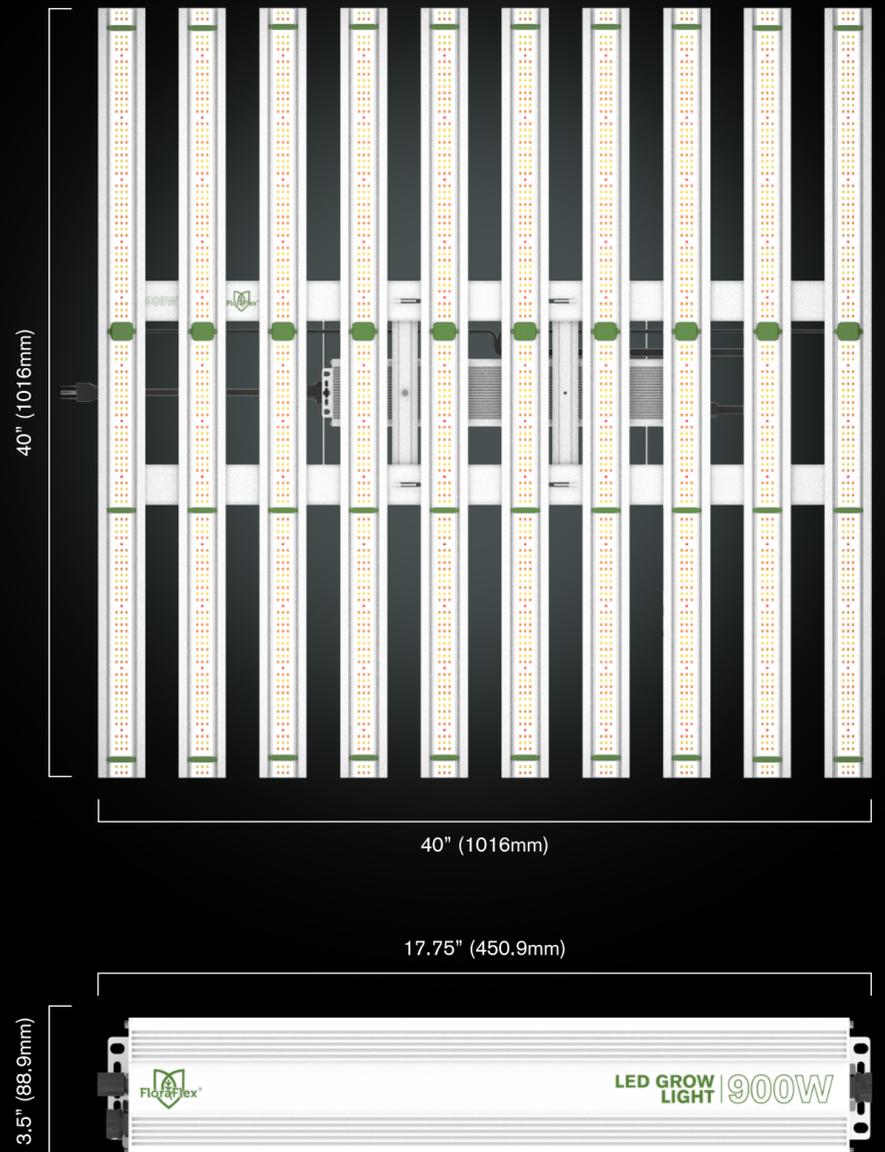


SPECIFICATIONS

Light Source	LED
Veg Coverage	5' x 5'
Bloom Coverage	4' x 4'
Light Output PPF	2430 $\mu\text{mol/s}$
Efficacy PPE	2.7 $\mu\text{mol/J}$
AC Input Power	900W
AC Input Voltage	120-277V AC, 50/60Hz
Light Distribution	120°
Mounting Height	12" - 24" (30.48cm - 60.96cm) Above Canopy
Thermal Management	Passive
Max Ambient Temperature	95° F / 35° C
Dimming	0 - 10V
Total Harmonic Distortion (THD)	15%
Lifetime	L90 > 50,000hrs
Certifications	UL 8800, UL 1598
Warranty	5 Year Standard Warranty

Product is wattage adjustable. Range can be adjusted from 100W - 900W
 NOMINAL ELECTRICAL AC INPUT*

AC Voltage	120V	240V	277V
AC Current	7.55A	4.12A	3.31A
AC Power	910W	890W	888W
Power Factor	0.99	0.98	0.96

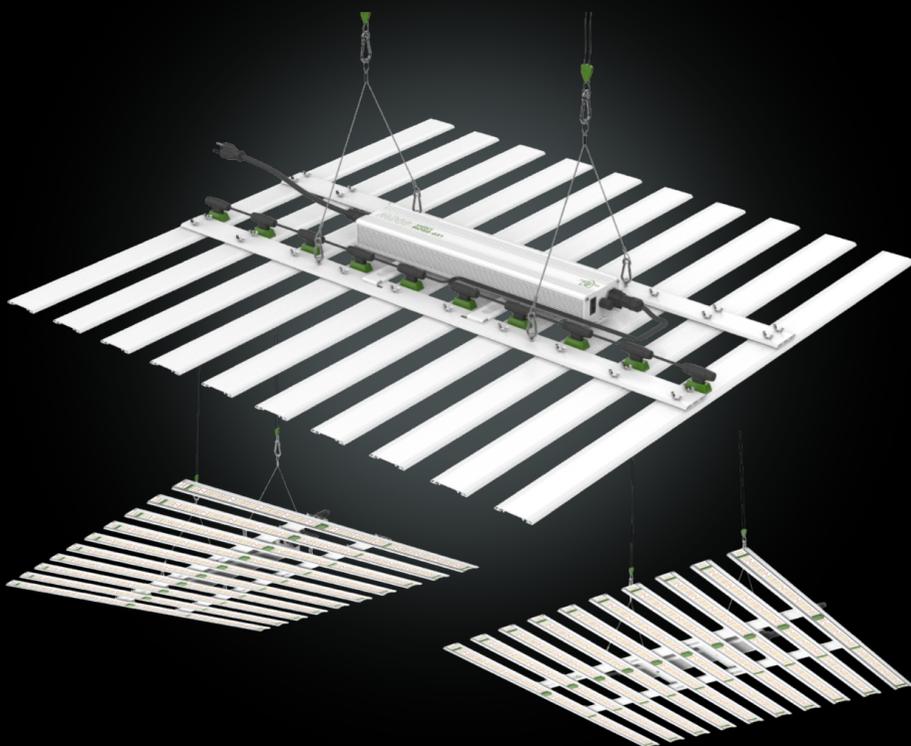

WEIGHTS & DIM'S

NET WT. 25.31 LB'S (11.48 KG)
 GROSS WT. 22.13 LB'S (10.04 KG)
 LENGTH: 41.73" (1060 MM)
 WIDTH: 8.66" (220 MM)
 HEIGHT: 8.27" (210 MM)

GUARANTEED BY:

FLORAFLEX CORP.
 4804 LAUREL CANYON BLVD.,
 SUITE 1047, STUDIO CITY, CA 91607
 WWW.FLORAFLEX.COM
 855-855-1053

PPFD CHART @ 12"

681	1012	1109	1155	1155	1109	1012	681
984	1414	1597	1624	1624	1597	1414	984
1063	1560	1747	1778	1778	1747	1560	1063
1109	1637	1798	1825	1825	1798	1637	1109
1109	1637	1798	1825	1825	1798	1637	1109
1063	1560	1747	1778	1778	1747	1560	1063
984	1414	1597	1624	1624	1597	1414	984
681	1012	1109	1155	1155	1109	1012	681

4' x 4' Coverage



Instruction Manual




Animated Assembly Guide



Live Action Assembly Tutorial

SPECTRUM

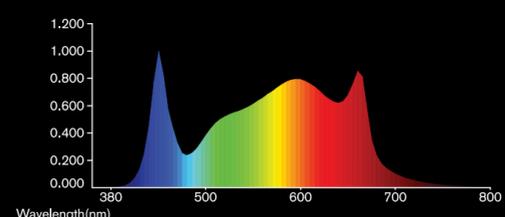

Certified by DLC Hort and rebate-eligible.
 Scan to find out more.



Intertek